

Additional Funding Request

| | | | | |
|---|--|---|----------|----------|
| MD002 | CSS# 18092 WO# 8249 Asset# NA | | | |
| Description of Repairs | Labor and materials to replace Phase B Monitor Module. | | | |
| Diagnosis: Initial Work Order | Power filter in alarm in unheated storage. | | | |
| Diagnostic Fee | \$ 160.00 TW Labor \$80/hr x 2 | | | |
| Additional Labor Cost to Perform Repairs | \$ 160.00 TW Labor \$80/hr x2 | | | |
| Additional Material Cost to Perform Repairs | \$ 657.65 | | | |
| | Schneider Electric/Square D MA1IMA12 Surgelogic #62403 | 1 | \$623.85 | \$623.85 |
| | Sales Tax | | | \$33.80 |
| Total Cost of Repair | \$ 977.65 | | | |



WORK ESTIMATE

CSS #: Work Order #:
Emergency Urgent Routine

| | | | |
|-------------------------|--|---|-------|
| Company Name: | Tidewater, Inc. | Facility ID: | MD002 |
| Contractor POC: | Adam Colopy | | |
| Telephone No: | 740-819-6207 | Building/Location; (e.g., Classroom/Room #) | |
| E-Mail Address: | adam.colopy@tideh2o.net | | |
| Assigned Technician(s): | John Brown | | |

DESCRIPTION of WORK and EXPLANATION for REPAIRS or REPLACEMENT

Labor and materials to replace Phase B Monitor Module.

| LABOR/MATERIAL | | MATERIAL/ SUB UNIT DOLLAR AMOUNT | LBR/HR \$80 | LINE ITEM TOTAL DOLLAR AMOUNT |
|--|----------|---|----------------|--|
| ITEM | QUANTITY | | | |
| Labor | | | 2 | \$160.00 |
| Schneider Electric/Square D MA1IMA12 Surgelogic #62403 | 1 | \$623.85 | | \$623.85 |
| Sales Tax | | | | \$33.80 |
| | | | | |
| Diagnostic | | | 2 | \$160.00 |
| | | | | |
| SUB-TOTAL COSTS: | | Materials Total | \$657.65 | Labor |
| | | | | \$320.00 |
| TOTAL | | | \$977.65 | |



SURGELOGIC™
Surge Protective Device

☀ = OK ● = Replace / Sustituir / Remplacer

Type MA / Tipo MA

Dispositivo de Protección contra Sobretensiones Transitorias
Dispositif de Protection contre les Surtensions

www.SquareD.com 8222-0001A
Made in USA / Hecho en E.U.A. / Fabriqué aux É.-U.




SURGELOGIC™
Surge Protective Device

☀ = OK ● = Replace / Sustituir / Remplacer

Type MA / Tipo MA

Dispositivo de Protección contra Sobretensiones Transitorias
Dispositif de Protection contre les Surtensions

www.SquareD.com 8222-0001A
Made in USA / Hecho en E.U.A. / Fabriqué aux É.-U.

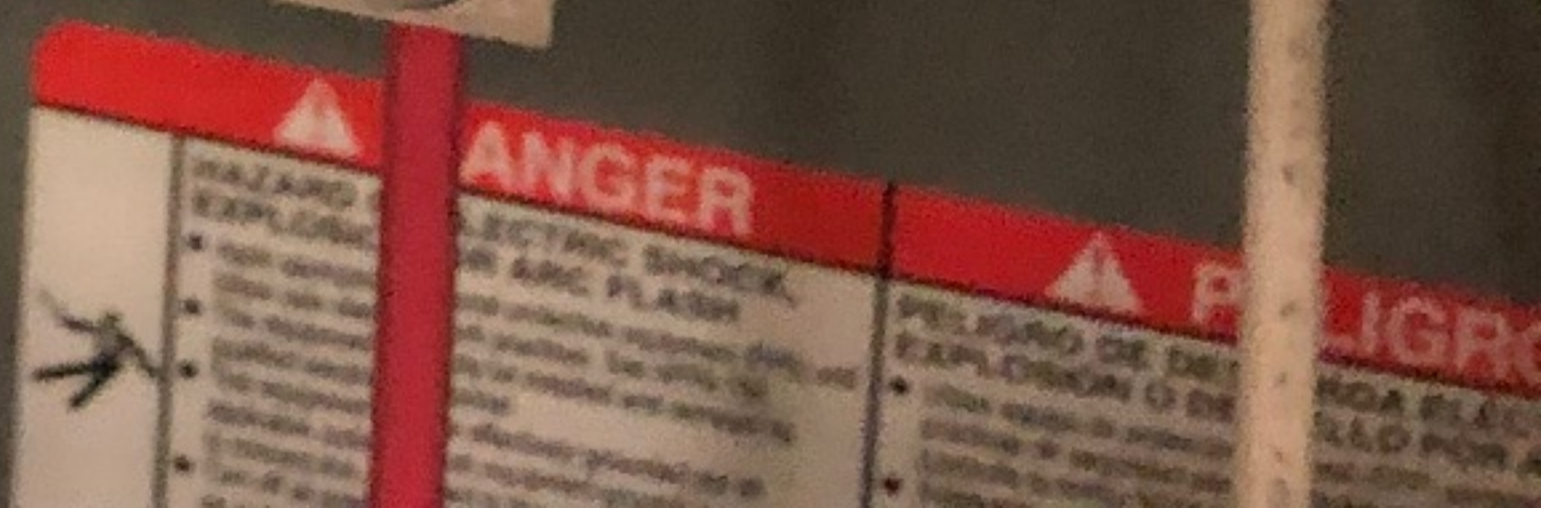



Schneider Electric / Square D MA1IMA12 SurgeLogic® EMA MA Replacement Module; 120 Kilo-Amp, 120/208 Volt AC, 1 Phase, Panel Mount

AVAILABILITY

Generally ships in 7-10 business days.



Manufacturer: Square D by Schneider Electric
Catalog#: MA1IMA12
Crescent Part#: 62403
UPC: 785901292913

Free Shipping!

Your Price
\$519.8710 /
each

1

**Images are representative of products listed and may not be actual product.*



Product Details

- 3 or 4 wire system
- L-N, L-G, N-G mode of protection
- 50 DB noise attenuation

[View Catalog](#)

[View Specifications Sheet](#)

[View Specifications Sheet](#)

NEW
UL TYPE B
1000W
LED HID REPLACEMENT

Same HID Fixture,
New LED Performance

UP TO
2.5x Longer Life
50% Less Energy

current powered by GE **LEARN MORE**

Alternatives to this item...



Ditek DTK-110C6APOE Surge Protective Device; 30 Amp, 48 Volt AC

\$111.5940/ each 1



Bussmann BSPM3480DLG Simple™ High SCCR Surge

Product Details: