

## Additional Funding Request

|   |   |     |     |  |                                 |   |     |     |
|---|---|-----|-----|--|---------------------------------|---|-----|-----|
| VA701                                       | CSS# 34614 WO# 16753  |     |     |  |                                 |   |     |     |
| Description of Repairs                      | Labor and materials to change boiler drain filters that are clogged and unclog floor drain that boiler drains into.     |     |     |  |                                 |   |     |     |
| Diagnosis: Initial Work Order               | Drain seems to be clogged in room 130 between the 2 boiler controllers.   |     |     |  |                                 |   |     |     |
| Diagnostic Fee                              | \$ 160<br>Labor \$80/hr x 2   |     |     |  |                                 |   |     |     |
| Additional Labor Cost to Perform Repairs    | \$ 480<br>Labor \$80/hr x 6   |     |     |  |                                 |   |     |     |
| Additional Material Cost to Perform Repairs | \$ 620<br><table border="1"><tr><td>Materials (See attached detail)</td><td>1</td><td>620</td><td>620</td></tr></table> |     |     |  | Materials (See attached detail) | 1 | 620 | 620 |
| Materials (See attached detail)             | 1   | 620 | 620 |  |                                 |   |     |     |
| Total Cost of Repair                        | \$ 1260   |     |     |  |                                 |   |     |     |



# WORK ESTIMATE

CSS #:

34614

Work Order #:

16753

Emergency

Urgent

X

Routine


|                         |  |   |       |
|-------------------------|--|---|-------|
| Company Name:           | Tidewater, Inc.  | Facility ID:                                | VA701 |
| Contractor POC:         | Adam Colopy  |   |       |
| Telephone No:           | 740-819-6207   | Building/Location; (e.g., Classroom/Room #) |       |
| E-Mail Address:         | <a href="mailto:adam.colopy@tideh2o.net">adam.colopy@tideh2o.net</a> |   |       |
| Assigned Technician(s): | Will Schultz   |   |       |

## DESCRIPTION of WORK and EXPLANATION for REPAIRS or REPLACEMENT


Labor and materials to change boiler drain filters that are clogged and unclog floor drain that boiler drains into.

| LABOR/MATERIAL              |          | MATERIAL/<br>SUB UNIT<br>DOLLAR<br>AMOUNT | LBR/HR<br>\$80 | LINE ITEM<br>TOTAL<br>DOLLAR<br>AMOUNT |
|-----------------------------|----------|---|----------------|--|
| ITEM                        | QUANTITY |   |                |  |
| Diagostic                   |          |   | 2              | \$160.00                               |
| Condensate Neutralizer Tube | 2        | \$254.20                                  |                | \$508.40                               |
| Recharge Kit                | 2        | \$55.80                                   |                | \$111.60                               |
| Labor                       |          |   | 6              | \$480.00                               |
|                             |          |   |                |  |
| SUB-TOTAL COSTS:            |          | Materials Total                           | \$620.00       | Labor \$640.00                         |
| TOTAL                       |          |   | \$1,260.00     |  |

TOP VIEW

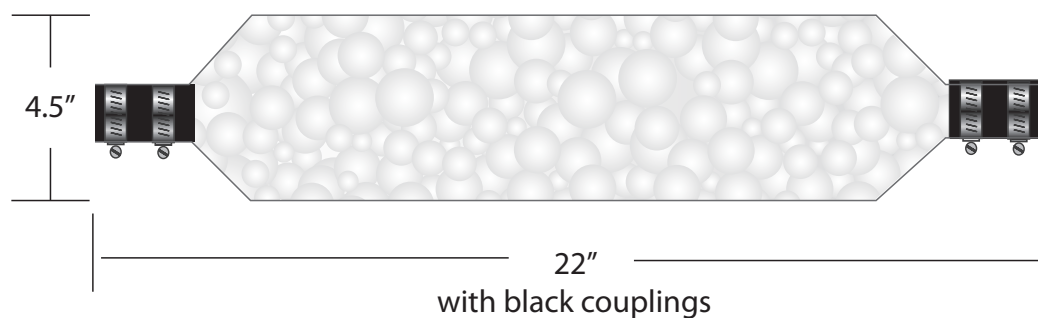

SIDE VIEW

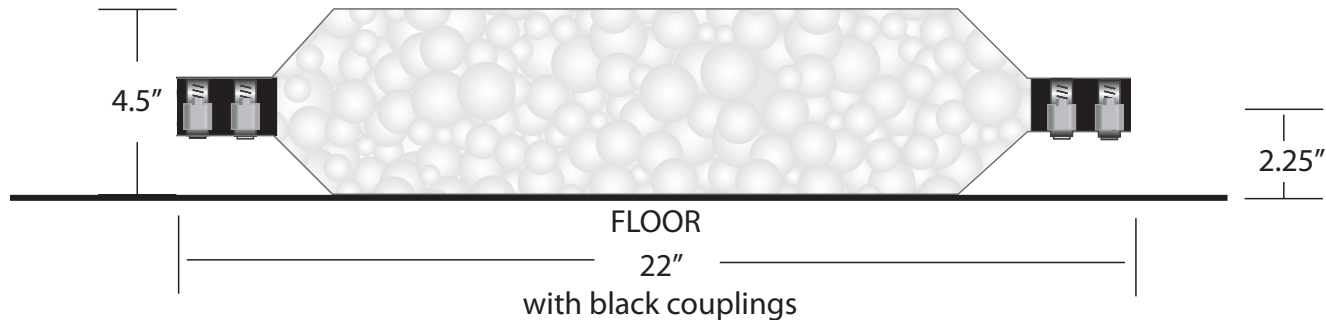

| PART NO. | MBH        | GPH  | MATERIAL  | #PELLETS | INLET PORT | OUTLET PORT |
|----------|------------|------|-----------|----------|------------|-------------|
| 5003     | 1,500 MAX. | 11.0 | CLEAR PVC | 8.5      | 1" Sch40   | 1" Sch40    |

STANDARD EQUIPMENT:

(2) 1" Acid Proof "Slip in Pipe" Poly Couplings, (4) Stainless Steel Clamps, Clear PVC Tube, MgO Pellets, (2) 1" Split Ring Pipe Clamps with 3/8" threaded rod bases.

**From:** David Wood <[dwood@tla-va.com](mailto:dwood@tla-va.com)>  
**Sent:** Thursday, March 10, 2022 10:51:19 AM  
**To:** William Schultz <[william.schultz@tideh2o.net](mailto:william.schultz@tideh2o.net)>  
**Subject:** [EXTERNAL]JJM Boiler Works Quote Request

**CAUTION: External email, DO NOT click on any links/attachments unless you recognize the sender and know the content is safe**

The JM-6 has been replaced by the following...

|       |  |                |
|-------|--|----------------|
| Qty-1 | CBM-226 (P/N 5003) Condensate Neutralizer Tube   | \$ 205.00 each |
| Qty-1 | JM06R (P/N 1105) Recharge Kit (pH Power Pellets) | \$ 45.00 each  |

F.O.B. Factory, Plus Freight

Estimated Leadtime to Ship: (3) to (5) Business Days After Receipt of Order