

Over and Above Estimate

Region: 2

Location: NY023

CSS #: 94203

Maximo Work Order No. 23358

Asset#:

Date Issued: 07/5/2023

Original Description: Clean and maintain pump in building 330, Room 214

Description of Repairs: Repair condenser pump; remove, unclog and drain; clean "A" coil with special acids rinse with clean water; charge system with R410A refrigerant; test for leaks

Non Pre-Priced Estimate:

Quantity	Line Item #	Description	Labor Hours	Unit	Labor	Materials	Equipment	Total
1		Materials (See attached estimate for line items)				\$1850.00	\$	\$1850.00

Note: RS Means (Pre-Priced) not used in compiling this estimate.

Note: Subcontractor quote attached.

Estimate Summary:

Labor Hours	Labor Cost	Material	Equipment Cost	Total Cost	CE Factor	Total Estimate
(2 Men 8hrs/ea) <u>16 @ 210.00</u> \$3360.00	\$3360.00	\$1850.00	\$	\$5210.00	1.02	\$5314.20

Please see attached estimate

ACAV SERVICES

July 11, 2023



ESTIMATE 071123 CSS94203 WO23358
PO10004-1052 (REPAIR)


Bill To		Ship To	
Customer	International Support Group M DUBOIS,	Recipient	99 RSC RD DPW L CORBO
Customer ID#	NY023 (BLDG 330A)	Address	Ernie Pyle USARC BLDG 206 Ft Totten NY
Address	9050 Pines Blvd STE 150 Pembroke Pines FL 33024	Phone	718 631 6188
Phone	954 900 1095		
Payment Due	NET 30	Delivery Date	
Salesperson	JW	Shipping Method	N/A
Payment Terms	N/A	Shipping Terms	N/A

Qty.	Item#	Description	Unit Price	Line Total
		<p>NY23 (BLDG 330A)</p> <p>CLEAN AND MAINTAIN AC PUMP IN RM 214</p> <p>AC (CONDENSER) UNIT LOW ON FREON</p> <p>REPAIR CONDENSER PUMP REMOVE UNCLOG AND DRAIN</p> <p>CLEAN "A" COIL WITH SPECIAL ACIDS RINSE WITH CLEAN WATER</p> <p>CHARGE SYSTEM WITH R410A REFRIGERANT</p> <p>TEST FOR LEAKS</p>		

ACAV Services

11 Snug Cove Lane
Bayville NY 11709
Jacka377@verizon.net
516 941 6581

Qty.	Item#	Description	Unit Price	Line Total
		<u>MATERIAL</u> 10 LBS R410A REFRIGERANT @ \$185.00 PER LB		\$1850.00
		<u>LABOR</u> 16 HRS @ \$210.00 PER HOUR 2 MEN 8 HRS EA		\$3360.00
		<u>TOTAL</u>		\$5210.00
				TOTAL \$5210.00

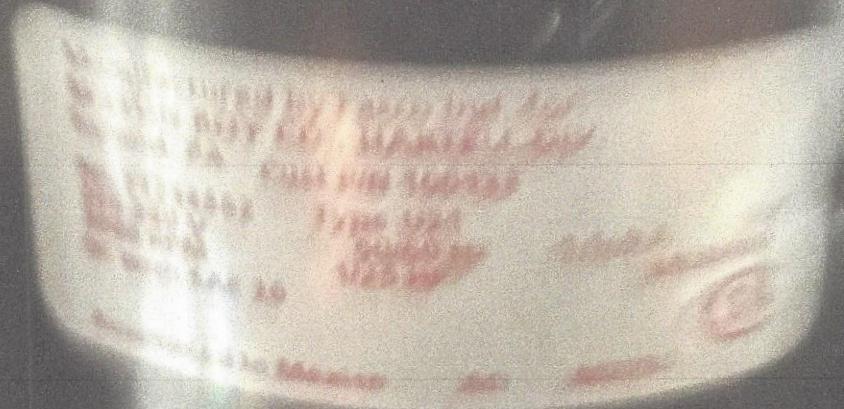

100% COTTON
PRINTED IN CHINA

UNIT 10



VRV IV
INVERTER

R410A

