

Pittsburgh
Plumbing &



55



SEGURIDAD D
SERVICIO GENER

30 A

240 Vac / V~

SQUARE D®



⚠ **DANGER / PELIGRO**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH
PELIGRO DE DESCARGA ELÉCTRICA, EXPLOSIÓN O
DESTELLO POR ARQUEO**

- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Never operate energized switch with door open. Keep door fastened.
- Turn off switch before removing or installing fuses or making load side connections.
- Always use a properly rated voltage sensing device at all line and load fuse clips to confirm switch is off.
- Turn off power supplying switch before doing any other work on or inside switch.
- Do not use renewable link fuses in fused switches.

Failure to follow these instructions will result in death or serious injury.

To lock through handle

- Utilice equipo de protección personal apropiado y siga las prácticas de eléctrica establecidas por su Comité (consulte la norma NFPA 70E).
- Solamente el personal eléctrico especializado deberá instalar y presionar el servicio de mantenimiento a este equipo.
- Nunca haga funcionar el interruptor con la puerta abierta cuando esté energizado. Mantenga la puerta asegurada.
- Desenergice el interruptor antes de exponer o instalar fusibles o de hacer conexiones en el lado de carga.
- Siempre utilice un dispositivo de tensión nominal adecuado en los clips para fusibles de los lados de carga y línea para confirmar la desenergización del interruptor.
- Desenergice el interruptor antes de realizar cualquier otro trabajo en el interruptor.
- No utilice fusibles de cinta renovables en los interruptores de fusible.

El incumplimiento de estas precauciones podrá causar la muerte o lesiones serias.


To lock through handle

Para bloquear el interruptor, pase la alidaba a través de la placa de la palanca.



PA050-01

Asset # 6591-Boiler-

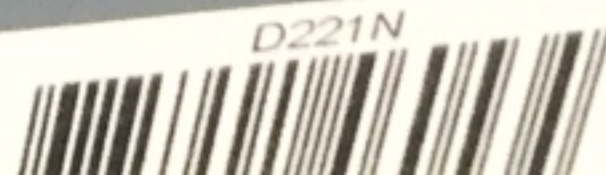

1315121500

MADE IN CHINA
KM101050A HP 1/2
AMP 4.9 PH 1
THERMALLY PROTECTED
5-122 MFG NO. 1303
CLASS F CODE U FRAME
ALLOW ALL SAFETY INFORMATION TO
REDUCE POTENTIAL ELECTRICAL SHOCK
POWER BEFORE SERVICING. FOLLOW
LOCAL CODES FOR GROUNDING AND
WIRE LEAD WIRE INDIVIDUALLY

UL FILE E28287

MADE IN CHINA

MODEL ZXM101050A HP 1/2
VOLT 115 HZ 60 AMP 4.9 PH 1
RPM 3450

THERMALLY PROTECTED

CUST PART NO. 185-122 MFG NO. 1303

CONTINUOUS CLASS F CODE U FRAME

WARNING - FOLLOW ALL SAFETY INFORMATION TO
DISCONNECT POWER BEFORE SERVICE. FOLLOW
NATIONAL AND LOCAL CODES FOR GROUNDING AND
INSULATE UNUSED LEAD WIRES INDIVIDUALLY.





185R-15018



HI-CAPACITY CIRCULATOR
MODEL 2400-50

MAX. PRESSURE 150 PSI RPM 3450

MAX WATER TEMP 107°C 225°F

WARNING

TO REDUCE RISK OF ELECTRICAL SHOCK SEE
INSTRUCTION MANUAL FOR PROPER INSTALLATION.
DISCONNECT POWER WHEN SERVICING. DO NOT USE
IN SWIMMING POOL AREAS. PUMP HAS NOT BEEN
INVESTIGATED FOR THIS APPLICATION.

CAUTION: FOR INDOOR USE ONLY
EMPLOYER UNIQUEMENT A L'INTERIEUR.

 **TACO INC. CRANSTON R.I. USA**
US WATER CIRCULATING PUMP

LISTED 989C

11-13