


PUL6438 CONTROLLER
POWER: 20-30 VAC, 20VA MAXIMUM @ 50/60 Hz
AMBIENT RATING: -40°F TO 150°F, -40°C TO 65°C
OUTPUT RATING: TERMINALS 9, 10, 12, 13, 15,
16, 18, 19; MAXIMUM 0.5AMP, CLASS 2
PATENT PENDING
HONEYWELL
GOLDEN VALLEY, MN 55422
ASSEMBLED IN MEXICO



50014982-003 REV A

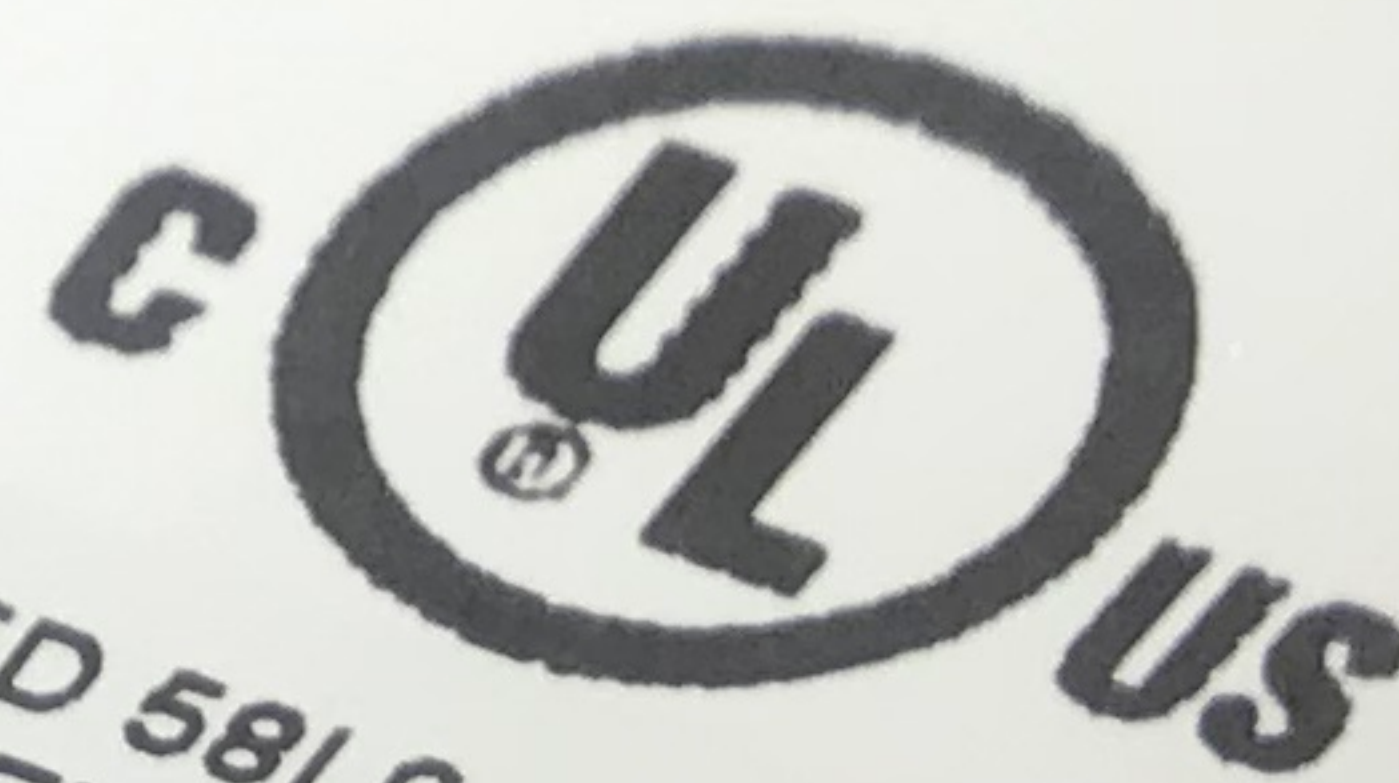

LISTED 58L9
ENCL. ENERGY
MGMT. EQPT.

CE 0738

PUL6438
NOTE

32000200

The INDEECO logo, consisting of the word "INDEECO" in a bold, sans-serif font, enclosed within a thick, black, horizontally-oriented oval border.

INDECO CATALOG NUMBER

SUPPLY INFORMATION IN ABOVE BOX WHEN CONTACTING FACTORY

CUSTOMER FURNISHED INFORMATION

108222		
P.O. NUMBER	ITEM	TAG NUMBER
MODEL NUMBER		

**AIRFLOW
DIRECTION**



WARNING

*** RISK OF ELECTRIC SHOCK. CAN CAUSE INJURY OR DEATH: DISCONNECT ALL REMOTE ELECTRIC POWER SUPPLIES BEFORE SERVICING.**


• RE-TIGHTEN ALL ELECTRICAL CONNECTIONS.

• SEE MANUAL.

- PRE - TIGHTEN ALL ELECTRICAL CONNECTIONS AFTER STARTING.
 SEE WIRING DIAGRAM INSIDE COVER FOR REQUIRED SUPPLY CONDUCTORS. USE
 COPPER CONDUCTORS WITH INSULATION RAYED 75 DEG. C. MINIMUM.
 AN FLOW THROUGH HEATER MUST BE FREE OF COMBUSTIBLE PARTICLES,
 FLAMMABLE VAPORS AND GASES.
 HEATER TERMINAL BOX MUST NOT BE ENCLOSED.
 INLET AIR TEMPERATURE INSTRUCTIONS FOR SPACES BETWEEN UNITS, MAXIMUM
 HEATER RATED FOR 90 OR 60 HZ A.C. CURRENT.
 SLIP AND SPOT CONNECTIONS.

SPECIAL INFORMATION

Page 1 of 1

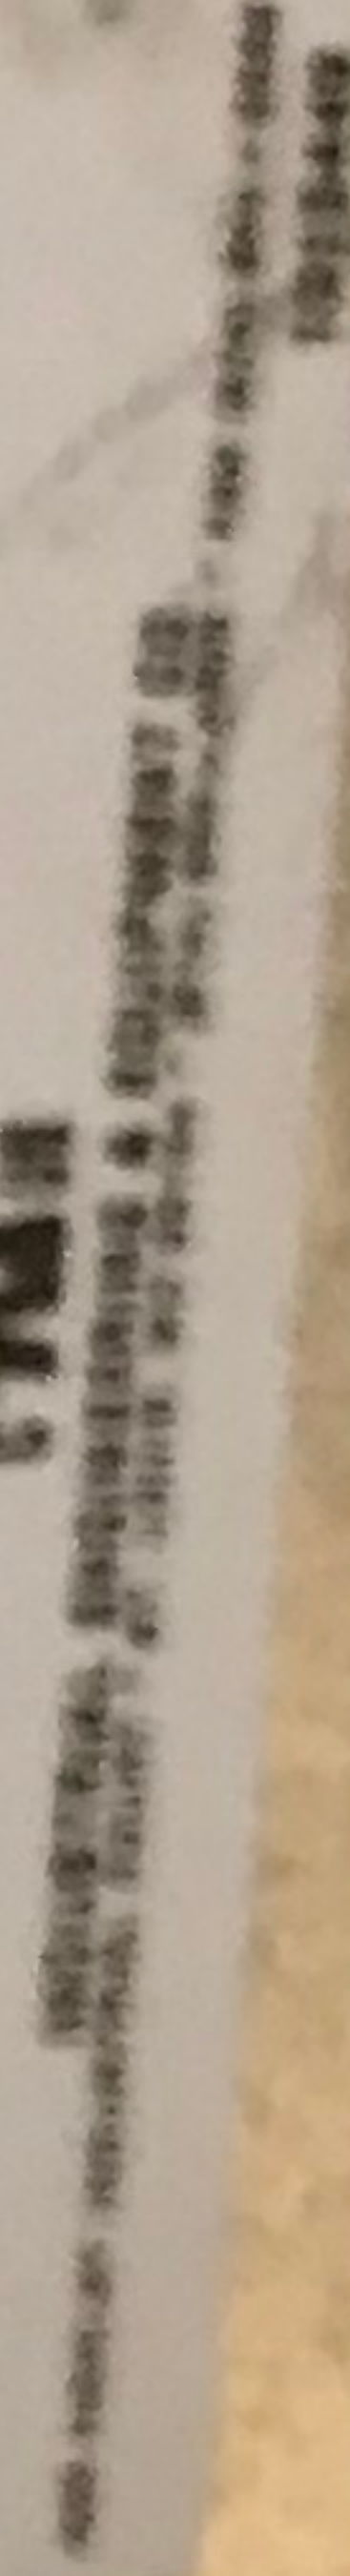[illegible]

Abstract

Equipment	Date	Source	Cost	P.M. SERVICE LOG