


GAS WATER HEATER



MINIMUM CLEARANCES
FROM COMBUSTIBLE OR
NON-COMBUSTIBLE
CONSTRUCTION
ARE LISTED BELOW:

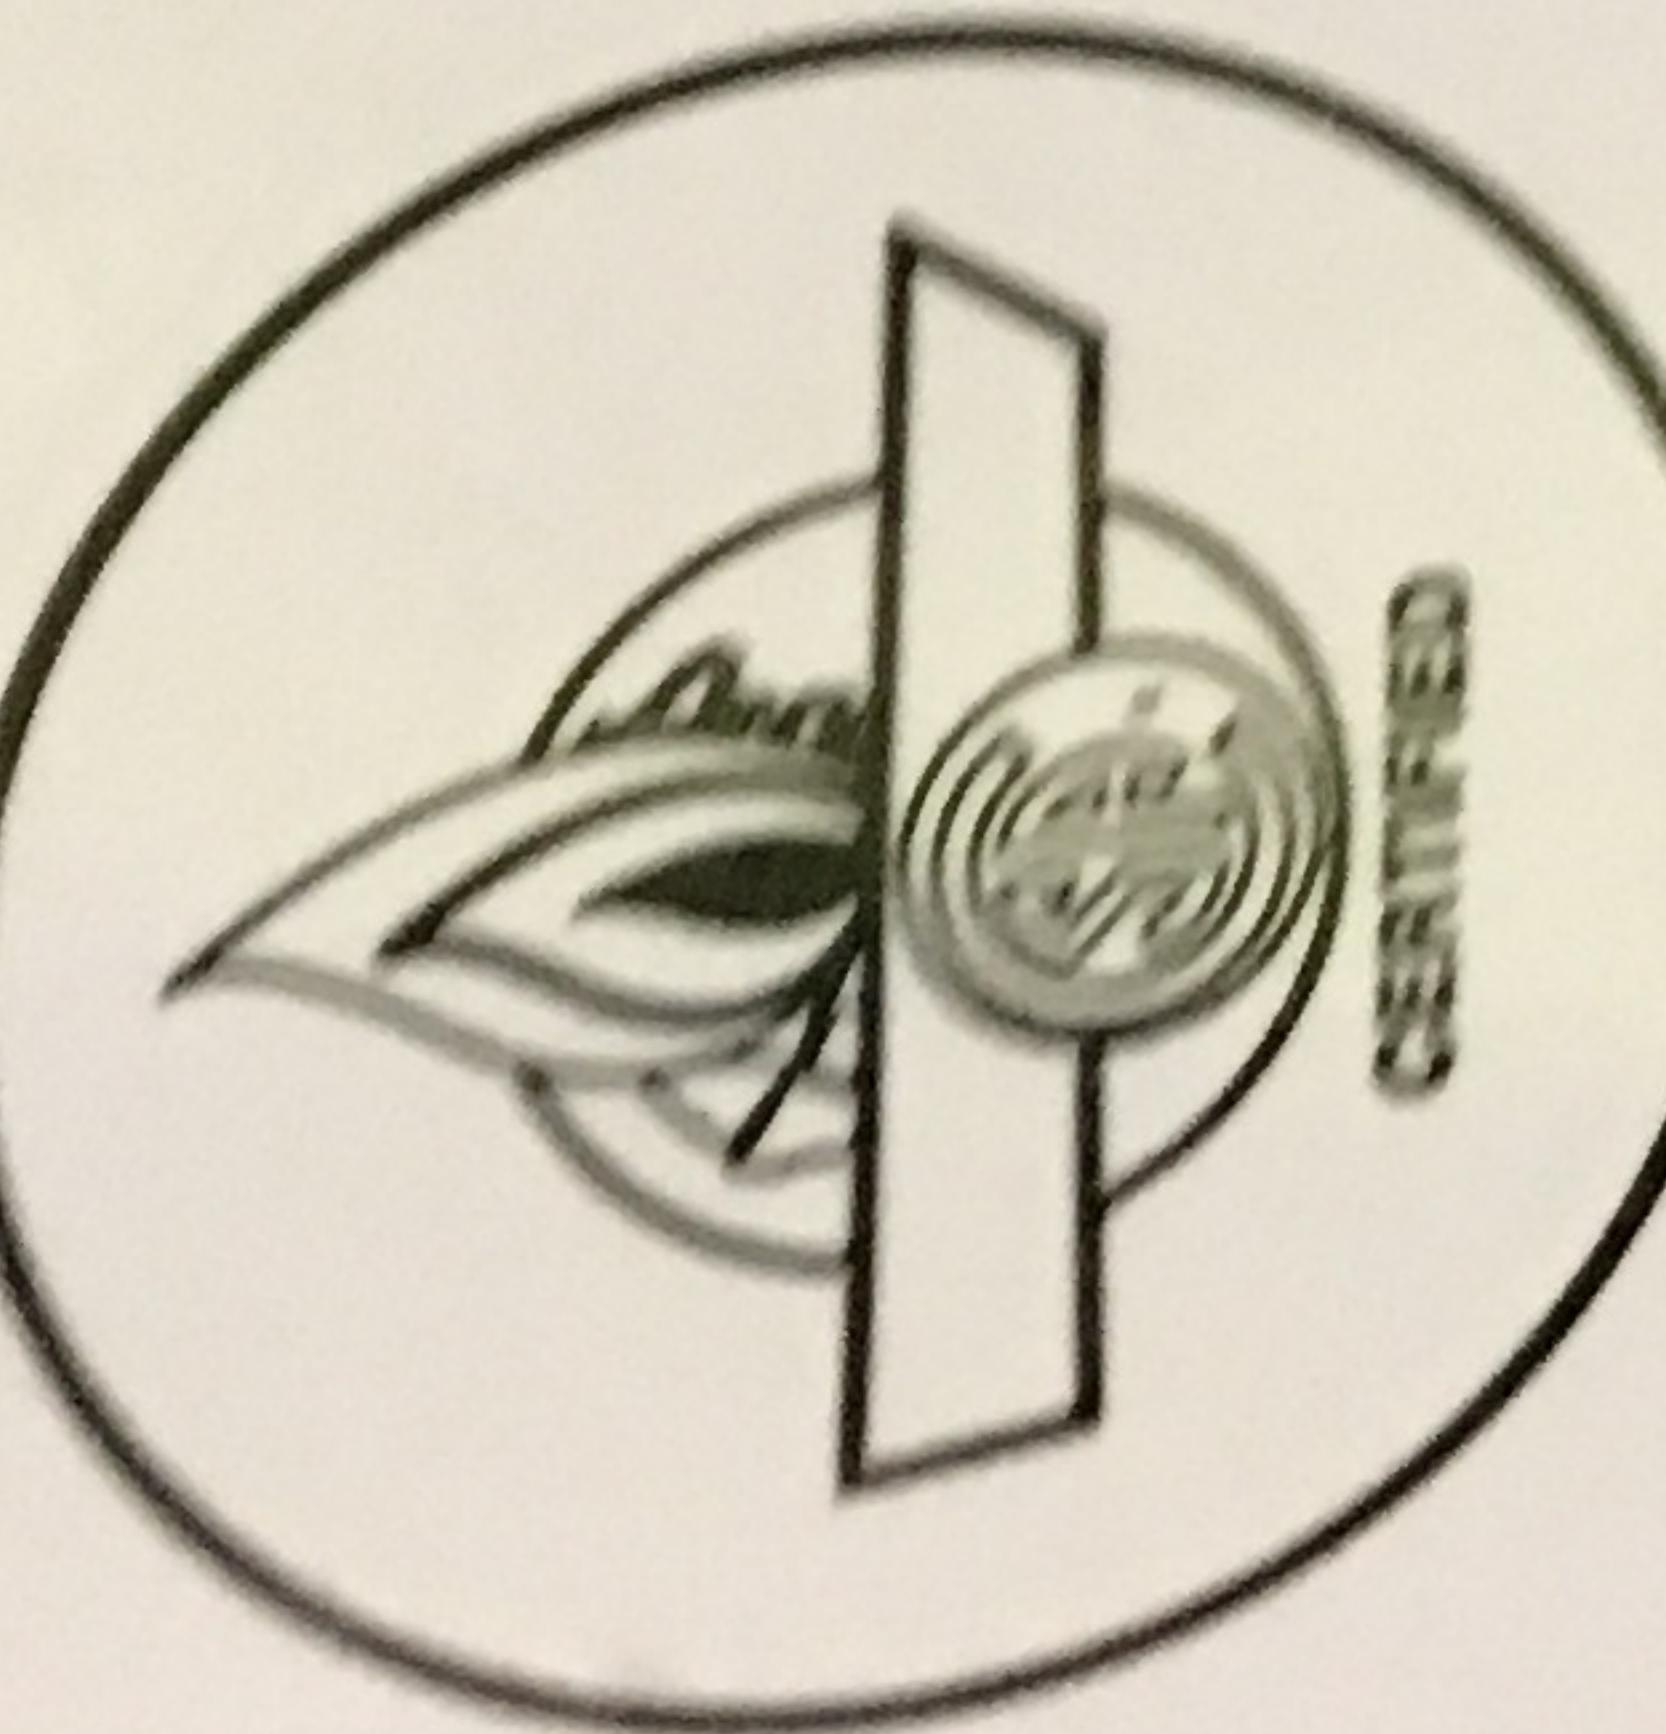

AX4752

SERIAL NO. RRLNQ101328076
MODEL NO. G75-75N-2
TYPE GAS/GAZ: NAT
INPUT BTUH 75,100
MAX. INLET 10.5" WC/2.61 kpa
RECOVERY/RECUPER 72.8 U.S. GPH / 275.6 LPH
CLEARANCES IN. 1 SIDES 0 REAR 12 TOP

ANS Z221.10.3+CSA 4.3-2011
ALT. 0' - 7700' / 0 - 2347M
CAPACITY 75 U.S. GAL / 283.8
MAN. PRESS./TUBUL PRESS: 5.0" WC/1.25 kpa
MIN. INLET 6.0" WC/1.49 kpa
MADE IN MEXICO


MODEL NO. G75-75N-2
STANDBY LOSS (% / HR) 2.46
ACTUAL CAPACITY (GAL) 72
STANDBY LOSS (BTU/HR) 1045
THERMAL EFFICIENCY (%) 80

MFG. DATE: 10/2013


C E C

THIS WATER HEATER IS CERTIFIED FOR INSTALLATIONS
UP TO 7,700 FEET ABOVE SEA LEVEL. INSTALLATIONS
ABOVE 7,700 FEET ARE NOT AUTHORIZED.

AX4753

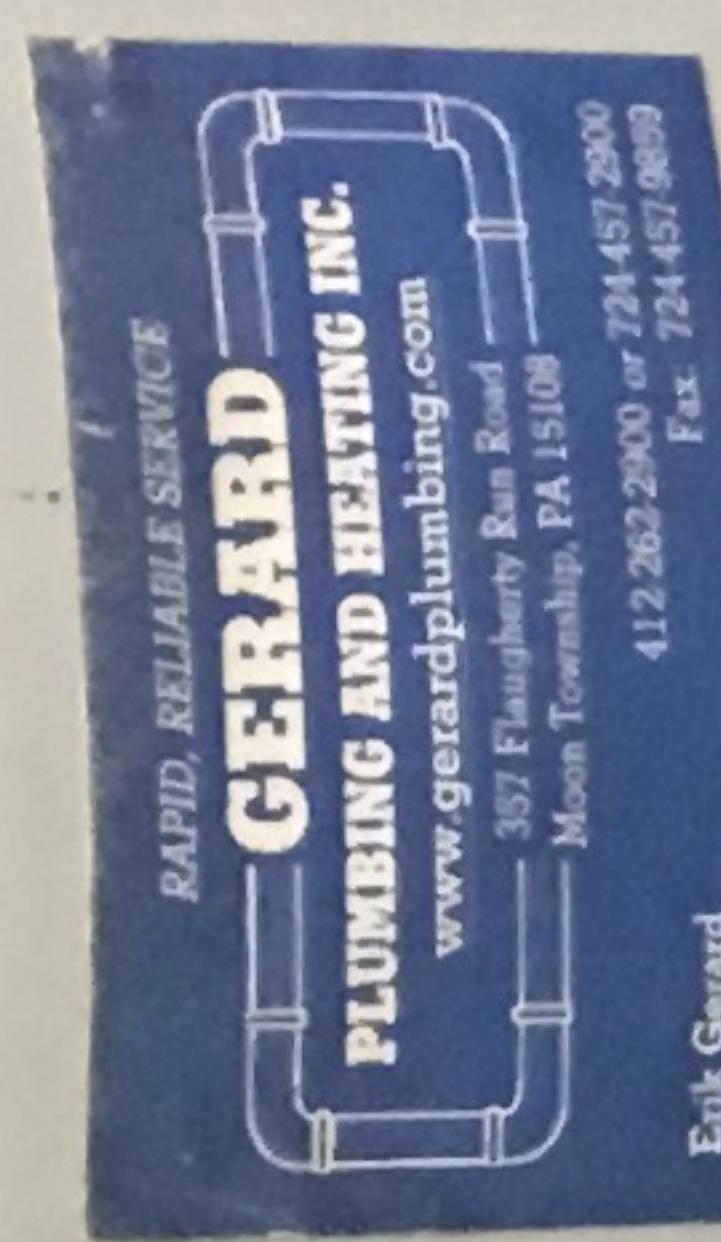

A61 P23-857
#2 Main
Floor Plan

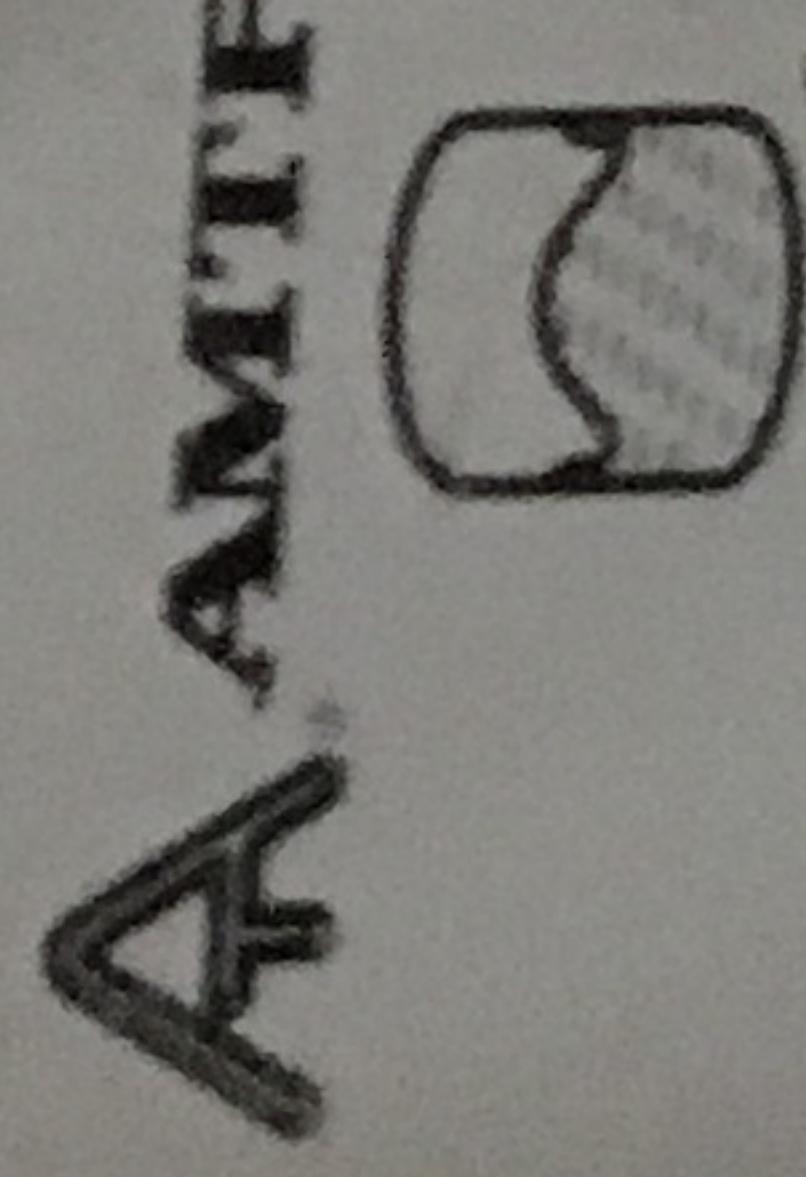

Mark
of the
Originator

Water Heater Safety Tank

May 1970
MOUNTAIN PRESS

40 P.S.I.G.
Dwight's
Professional
Charging Pressure

...and he must have installed

AWARDING

This product requires following the instructions in the manual. Failure to follow the instructions can result in damage to the equipment.

EXPLODING SIGHT HAZARD. Failure to observe the temperature setting where the tank is specified can possibly cause an explosion; rupturing pressure or explosion; Do not operate in a setting where the tank can overheat or overpressure. Do not use maximum working tanks; this may cause an explosion. Do not use only potable water. Do not exceed the maximum pressure of the tank.

freezing and do not except for any
RUPTURE OR EXPLOSION HAZARD. Like most products
this product can cause damage or re-pressurize or re-freeze
and burst or explode.

Do not adjust the product to prevent flooding or damage when the product is leaking or water damage occurs. Do not locate this product for corrosive & aggressive elements in the environment. Do not locate this product for corrosive & aggressive elements in the environment.

WARNING Chlorine should not be used as a product. You should treat your life of your chlorine including chlorine, including failure. 80 Gallons of chlorine, including failure.

maximum precharge voltage must be matched to water heater volume and prevent precharge voltage from exceeding the static surge voltage of the water heater.