

Additional Funding Request

NY051	CSS# 31380 WO# 13992							
Description of Repairs	Labor and materials to replace 2 wall packs with close match, original model and parts no longer available. NOTE: upon Patrick's investigation, all emergency exit signs were working, but it was found that 2 wall pack lights are not.							
Diagnosis: Initial Work Order	Repair all emergency exit signs in drill hall.							
Diagnostic Fee	\$ 160 Labor \$80/hr x 2							
Additional Labor Cost to Perform Repairs	\$ 480 Labor \$80/hr x 6							
Additional Material Cost to Perform Repairs	\$ 500.60 <table border="1"><tr><td>120/277V Halogen Emergency LightW. White Steel, Nickel Cadmium Battery Chemistry</td><td>2</td><td>250.30</td><td>500.60</td></tr></table>				120/277V Halogen Emergency LightW. White Steel, Nickel Cadmium Battery Chemistry	2	250.30	500.60
120/277V Halogen Emergency LightW. White Steel, Nickel Cadmium Battery Chemistry	2	250.30	500.60					
Total Cost of Repair	\$ 1,140.60							



WORK ESTIMATE

CSS #: 31380

Work Order #: 13992

Emergency ☒

Urgent ☐

Routine ☐

Company Name:	Tidewater, Inc.	Facility ID:	NY051
Contractor POC:	Adam Colopy		
Telephone No:	740-819-6207	Building/Location; (e.g., Classroom/Room #)	
E-Mail Address:	adam.colopy@tideh2o.net		
Assigned Technician(s):	Patrick Brown		


DESCRIPTION of WORK and EXPLANATION for REPAIRS or REPLACEMENT

Labor and materials to replace 2 wall packs with close match, original model and parts no longer available. NOTE: upon Patrick's investigation, all emergency exit signs were working, but it was found that 2 wall pack lights are not.

LABOR/MATERIAL		MATERIAL/ SUB UNIT DOLLAR AMOUNT	LBR/HR \$80	LINE ITEM TOTAL DOLLAR AMOUNT
ITEM	QUANTITY			
Diagnostic			2	\$160.00
120/277V Halogen Emergency LightW, White Steel, Nickel Cadmium Battery Chemistry	2	\$250.30		\$500.60
Labor			6	\$480.00
SUB-TOTAL COSTS:		Materials Total	\$500.60	Labor \$640.00
TOTAL			\$1,140.60	



Cart

Item	Quantity	Total Price	Item Availability
<div><div><div>BRADY 120/277V Halogen Emergency LightW, White Steel, Nickel Cadmium Battery Chemistry Item #15Y798 Your Price: \$195.55</div></div></div>	2	\$391.10	Expected to arrive Fri. Jul 23 using standard ground shipping (additional shipping options available at Checkout.)



A MANUAL TEST

BE TERMINATED AT ANY
BY DEPRESSING AND RE-
ECT" AND "TEST"
Y (RESET)

FOR CONDITION:

NDITION THAT CAUSED THE
AND RELEASE BOTH THE
TTIONS SIMULTANEOUSLY
FAILURE INDICATION

ATOR DIRECTORY

LOCATE DEFECTIVE
CTIVE LAMP(S).

IONS IF O.K.

ACE CHARGER BOARD

011282 REV 1


CHLORIDE EMERGENCY LIGHTING MODEL: 12NMF25UAD

INPUT: 120/277VAC. 60HZ. .06/.03A MAX

OUTPUT: 12VDC. 25W

DISCHARGE TIME: 1.5 HOURS

REPL BATTERY: 100-3-A064

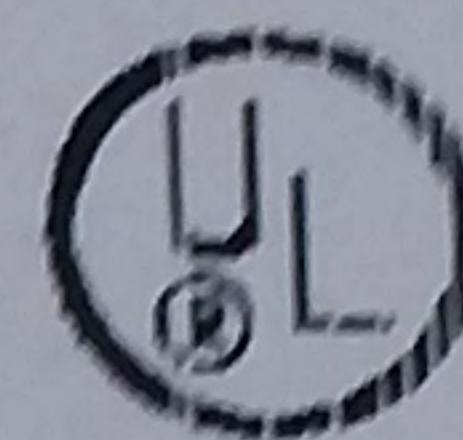

LISTED
871C

(914-2-1652)

0210050247C

CAUTION: SEE INSTRUCTION MANUAL FOR INSTALLATION,
OPERATING AND MAINTENANCE INSTRUCTIONS.
THIS EQUIPMENT IS NOT INTENDED FOR USE WITH RIGID
CONDUIT TO UL508. USE FLEXIBLE CONDUIT & RECOGNIZED
CONNECTOR OR NON-METALLIC SHEATHED CABLE ONLY.

(914-1-310)

MAY 17 2004

SELF DIAGNOSTICS USER GUIDE

AFTER ENERGIZING AC POWER TO THE UNIT ALL LEDS WILL FLASH YELLOW. WHEN BATTERY VOLTAGE REACHES AN ACCEPTABLE LEVEL ALL LEDS WILL TURN GREEN. MANUAL TESTING CAN NOW BE PERFORMED.

NOTE: LEAVE AC CONNECTED FOR A MINIMUM OF 24 HOURS BEFORE PERFORMING ANY ABBREVIATED TESTING. FULL RECHARGE OF BATTERIES MAY TAKE UP TO ONE WEEK.

INITIATING A MANUAL TEST:

- 1) DEPRESS AND RELEASE THE "SELECT" BUTTON UNTIL THE INDICATOR FOR THE DESIRED TEST IS ILLUMINATED YELLOW.
- 2) DEPRESS AND RELEASE THE "TEST" BUTTON TO BEGIN THE MANUAL TEST. THE EMERGENCY LAMP(S) WILL ILLUMINATE FOR THE SELECTED TEST PERIOD. THE ASSOCIATED TEST INDICATOR WILL FLASH YELLOW DURING THE TEST. FOR UNITS EQUIPPED WITH THE OPTIONAL ALARM FEATURE, AN ALARM TONE WILL BE HEARD AT THE START OF THE MANUAL 90 MINUTE TEST.

CANCELING A MANUAL TEST:

- 3) A MANUAL TEST CAN BE TERMINATED AT ANY TIME DURING TESTING BY DEPRESSING AND RELEASING BOTH THE "SELECT" AND "TEST" BUTTONS SIMULTANEOUSLY (RESET).

CLEARING AN ERROR CONDITION:

- 4) FIRST CORRECT THE CONDITION THAT CAUSED THE FAILURE. THEN DEPRESS AND RELEASE BOTH THE "SELECT" AND "TEST" BUTTONS SIMULTANEOUSLY WHICH WILL CLEAR THE FAILURE INDICATION (RESET).

STATUS INDICATOR DIRECTORY

1) LAMP INDICATOR RED

MANUALLY TEST UNIT TO LOCATE DEFECTIVE LAMP(S). REPLACE DEFECTIVE LAMP(S).

2) BATTERY INDICATOR RED

CHECK BATTERY CONNECTIONS. IF O.K. REPLACE BATTERY.

3) CHARGE INDICATOR RED

CIRCUIT FAILURE. REPLACE CHARGER BOARD.

9140011282 REV 1