

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: NY067 Date of Visit: 12/14/20

Contractor Personnel on Site:

1. <u>PATRICK BROWN</u>	3. _____
2. _____	4. _____

Work Performed:

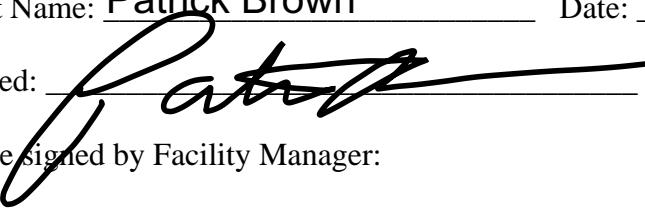
Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. WO's 10723PFQ,10746-10750PMFQT,10814MO, 10843-10843QT,
2. 10918-10923SA, 11044PMM,11075PMS,10845QT, 10924-10926SA,11076PMS
3. 10927SA,11077PMS
4. FILTERS, LIGHTING,SUMP PUMP, GREASE TRAP,HEATERS,GATES
5. WALL PACKS, EXHAUST SYSTEM

CERTIFICATION OF WORK

To be signed by the Contractor:

Print Name: Patrick Brown Date: 12/14/20

Signed: 

To be signed by Facility Manager:


By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

Print Name/Rank: SFC WILLIAM MONTES Date: 12/14/20

Signed: 

E-Mail: _____

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST
GREASE TRAP

SITE AND BLDG #: **NY067-01**MECHANIC
SIGNATURE: DATE: **12/14/20**LOCATION/RM #: **WO# 10844 ASSET # 10615**START TIME: **10am**FINISH TIME: **10:30am**

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	✓	/	
2	Insure proper grease disposal.-Tanks are pumped by local septic companies	✓	/	
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Remove lid. If the trap is equipped with removable baffles, remove them.	✓	/	
2	Make sure the flow restrictor on the inflow pipe is present.	✓	/	flow restrictor is present
3	If damages, missing parts, or cleaning is required, report them as needed to ensure proper working operation.	✓	/	no damage or missing parts
4	Replace lid and baffles.	✓	/	
5	Record grease trap maintenance activities on your log or request a receipt from your grease hauler. Keep records for 3 years. -In Maximo under WO#	✓	/	no grease removed by hauler

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: General Maintenance Technician

Additional Notes: