

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: NY039 Date of Visit: 4/21/21

Contractor Personnel on Site:

- | | |
|-------------------------|----------|
| 1. <u>PATRICK BROWN</u> | 3. _____ |
| 2. _____ | 4. _____ |

Work Performed:

Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

- | |
|---|
| 1. <u>WO#'S, 12413 - 12416 , 12469 , 12470 , 12476 , 12477 ,</u> |
| 2. <u>12490 ,</u> |
| 3. <u>ASSET#'S, 9899 - 9901 , 9932 , 9935 , 9945 , 190917-, 252 ,</u> |
| 4. <u>272 , 269</u> |
| 5. _____ |

CERTIFICATION OF WORK

To be signed by the Contractor:

Print Name: Patrick Brown Date: 4/21/21

Signed: 

To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

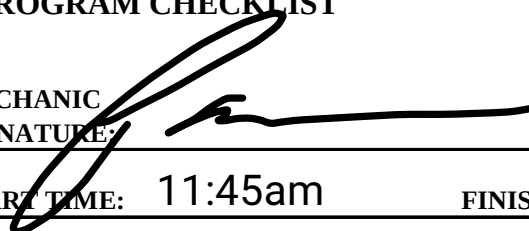
Print Name/Rank: SGT STORMS Date: 4/21/21

Signed: 

E-Mail: _____

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST

GATES

SITE AND BLDG #: NY039 BLDG1 MECHANIC SIGNATURE:  DATE: 4/21/21

LOCATION/RM #: side bldg, WO# 12470 ASSET # 190917-269 START TIME: 11:45am FINISH TIME: 1pm

back entry 12490 9935

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	✓	✓	
2	Notify affected personnel before performing PM	✓	✓	
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Inspect all pivot points, hinges, latches, etc. Apply lubricant where needed, wiping off excess.	✓	✓	used PB blaster garage door lubricant
2	Check all locking devices. Lubricate as required.	✓	✓	all are good
3	Inspect gate support rollers and track, lubricate and clean as required.	✓	✓	used white lithium grease
4	Check bolts, fasteners, and mounting hardware. Tighten as necessary.	✓	✓	all are tight
5	Check for any obstructions that prevent full swing or movement of the gate.	✓	✓	no obstructions
6	Check that shrubs and trees are pruned clear of gate.	✓	✓	shrubs and trees are clear of gate
7	Check hold open devices for proper operation. Lubricate as required.	✓	✓	
8	Check the top guard and ensure that it is properly fastened and the wires are tight. Tighten as required.	✓	✓	top gaurd and wires are tight
9	If applicable, inspect hydraulic driveline (hoses, fittings, and gauges) for signs of leakage.	✓	✓	no hydraulics
10	If applicable, inspect limit switches for proper operation. Adjust as needed.	✓	✓	limit switches are correct
11	If applicable, inspect photoeyes for proper operation and any signs of damage.	✓	✓	no sign's of damage
12	If applicable, have site personnel operate gate with CAC Card insuring proper operation.	✓	✓	gate functions properly with card
13	If applicable, clean control cabinent, ensuring free from debris and insects.	✓	✓	no debris or insects

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed discription of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes: