

CERTIFICATION OF WORK PREVENTIVE MAINTENANCE

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: _____ Date of Visit: _____

Contractor Personnel on Site:

1. _____	3. _____
2. _____	4. _____

Work Performed:

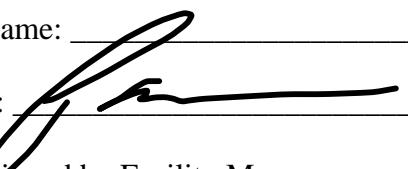
Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. _____
2. _____
3. _____
4. _____
5. _____

CERTIFICATION OF WORK

To be signed by the Contractor:

Print Name: _____ Date: _____

Signed: 

To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

Print Name/Rank: _____ Date: _____

Signed: 

E-Mail: _____

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST
UNIT HEATER, HOT WATER

SITE AND BLDG #: **NY035-01**MECHANIC
SIGNATURE: DATE: **6/7/19**LOCATION/RM #: **Assembly WO#4076 ASSET # 9820**START TIME: **8:30am**FINISH TIME: **9:15am**

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer's recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered to.			
2	Schedule shutdown with operating personnel.			
3	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.			
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Check valve for full stroke operation in both directions, if applicable.			not applicable
2	Check valve for signs of abnormal wear and leaks. Replace packing if needed.			no abnormal wear or leaks
3	Clean the coil with vacuum cleaner.			coils are clean
4	Comb the fins as needed.			fins are straight
5	Clean all fans and motors.			fans and Motors are clean
6	Check operation of controls and safeties.			all controls function correctly
7	Lubricate as required.			
8	Check all motors, belts, pulleys, shafts, etc. for alignment.			all are aligned properly

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes: