

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: _____ Date of Visit: 3/4/19

Contractor Personnel on Site:

1. _____	3. _____
2. _____	4. _____

Work Performed:

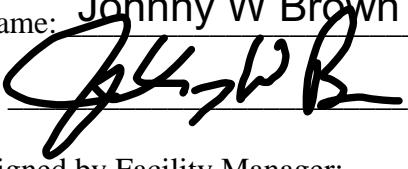
Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. _____
2. _____
3. _____
4. _____
5. _____

CERTIFICATION OF WORK

To be signed by the Contractor:

Print Name: Johnny W Brown Date: 3/4/19

Signed: 

To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

Print Name/Rank: SSG RICHARD GAYTON Date: 3/4/19

Signed: 

E-Mail: _____

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST
FAN COIL UNIT/ DUCTLESS MINI SPLIT

SITE AND BLDG #: **MD024-01**MECHANIC
SIGNATURE: 3/4/19LOCATION/RM #: **WO# 7851 ASSET # 2157-2160** START TIME: **0900** FINISH TIME: **1630**

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer's recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered to.	/		
2	Schedule shutdown with operating personnel, as needed.	/		
3	As needed, de-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work. Follow lock out/tag out procedures at all times.	/		
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Check fan blades for dust buildup and clean if necessary.	/		
2	When applicable, check fan blades and moving parts for cracks and excessive wear.	/		
3	Tighten all electrical connectors to proper torque as needed.	/		
4	Check that the fan runs properly in all speeds as applicable.	/		
5	Check dampers and rotating auto diffusers for dirt accumulations, clean as necessary. Check felt, repair or replace as necessary.	/		
6	Check damper actuators and linkage for proper operation as applicable. Adjust linkage on dampers if out of alignment.	/		
7	Lubricate mechanical connections of dampers sparingly as applicable.	/		
8	Check the valve(s) for signs of leakage and proper operation. If leak is detected, submit a UE.	/		
9	Clean coils by brushing, blowing, vacuuming, or pressure washing.	/		
10	Check coils for leaking, tightness of fittings.	/		
11	Use fin comb to straighten coil fins as needed.	/		
12	Check belts for wear and cracks, adjust tension or alignment as applicable. Replace belts when necessary.	/		
13	Check rigid couplings for alignment on direct drives, and for tightness of assembly	/		
14	Vacuum interior of unit.	/		

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
15	Check filter door for proper gasketing and air leaks. Correct as necessary.	/		
16	Change the filter as needed with the correct size and type filter.	/		
17	Insure that drain(s) are clear and running.	/		
18	Clean up work area.	/		

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes:

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST
LIGHTING, OUTSIDE

SITE AND BLDG #: **MD024-01**MECHANIC
SIGNATURE: DATE: **3/4/19**LOCATION/RM #: **WO# 7851 ASSET # 2161**START TIME: **0900** FINISH TIME: **1630**

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer's recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered to.	/		
2	Schedule and coordinate work with operating personnel.	/		
3	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	/		
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Open and tag switch.	/		
2	Inspect visual condition of wiring. Look for evidence of overheating.	/		
3	Check for proper light operation.	/		
4	Test operation of automatic switches/ time clock/ photocells if applicable.	/		
5	Inspect light pole and mounting devices for deficiencies.	/		
6	For any noted deficiency, takes pictures and open corrective maintenance ticket.	/		

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes: