

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: _____ Date of Visit: 6/11/19

Contractor Personnel on Site:

- | | |
|----------|----------|
| 1. _____ | 3. _____ |
| 2. _____ | 4. _____ |

Work Performed:

Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. _____
2. _____
3. _____
4. _____
5. _____

CERTIFICATION OF WORK

To be signed by the Contractor:

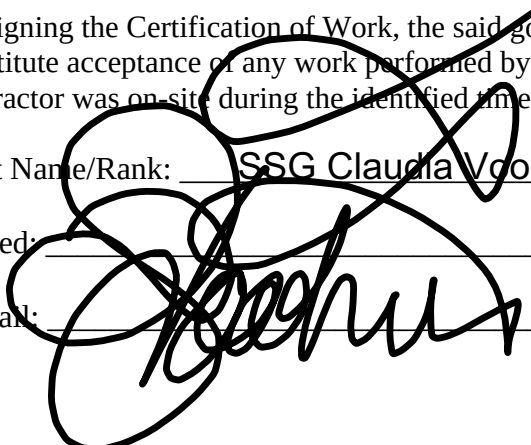
Print Name: Johnny W Brown Date: 5/11/19

Signed: _____


To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

Print Name/Rank: SSG Claudia Voorhies Date: 5/11/19

Signed: _____


E-Mail: _____

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST
GREASE TRAP

MECHANIC
SIGNATURE



DATE: 6/11/19

SITE AND BLDG #: MD002-03

should be asset 1507

LOCATION/RM #: WO# 8927 ASSET # 1505

START TIME: 0900

FINISH TIME: 1630

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer's recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered.		/	
2	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.		/	there is no grease trap at this building
3	Insure proper grease disposal.		/	
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Do not use enzymes, acids, caustics, solvents or emulsifying products when cleaning or maintaining the grease traps.		/	
2	Remove lid. If the trap is equipped with removable baffles, remove them.		/	
3	Make sure the flow restrictor on the inflow pipe is present.		/	
4	If damages, missing parts, or cleaning is required, report them as needed to ensure proper working operation.		/	
5	Replace lid and baffles.		/	
6	Return (or fill) water to grease trap		/	
7	Record grease trap maintenance activities on your log or request a receipt from your grease hauler. Keep records for 3 years.		/	

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed discription of the deficiency.

To be performed by: General Maintenance Technician

Additional Notes:

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST

VEHICLE EXHAUST REMOVAL

 MECHANIC
SIGNATURE:



DATE: 6/11/19

SITE AND BLDG #: MD002-03

START TIME: 0900

FINISH TIME: 1630

LOCATION/RM #: WO# 8927 ASSET # 1508

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer’s recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered.	/		
2	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	/		
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Start and stop fan with local switch	/		
2	Check motor and fan shaft bearings for noise, vibraton, overheating; lubrucate bearings.	/		
3	Inspect, adjust belts and pulleys. Replace belt as needed.	/		
4	Clean dampers; lubricate pivot points (annually) and inspect linkages for tightness.	/		
5	Inspect fan for bent blades, unbalance, excessive noise and vibration.	/		
6	Clean fan as needed.	/		
7	Visually inspect exhaust system tubing and/or duct work for any damage that could result in leaks.	/		
8	Repair as needed	/		

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes: