

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: _____ Date of Visit: 6/11/19

Contractor Personnel on Site:

1. _____	3. _____
2. _____	4. _____

Work Performed:

Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. _____
2. _____
3. _____
4. _____
5. _____

CERTIFICATION OF WORK

To be signed by the Contractor:

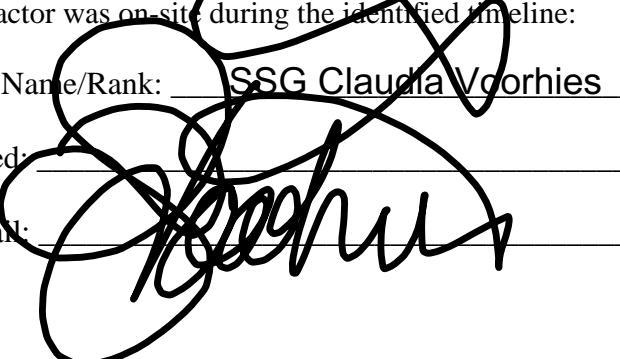
Print Name: Johnny W Brown Date: 5/11/19

Signed: 

To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

Print Name/Rank: SSG Claudia Voorhies Date: 5/11/19

Signed: 

E-Mail: _____

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST
UNIT HEATER, INFRA-RED, RADIANT, GAS

SITE AND BLDG #: **MD002-04**MECHANIC
SIGNATURE: DATE: **6/11/19**LOCATION/RM #: **WO# 8958** **ASSET # 1854**START TIME: **0900** **FINISH TIME: 1630**

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer's recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered to.	/	\	
2	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	/	\	
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	For gsa/oil heaters: 1. Remove access panels if applicable. 2. Check the fire box liner or refractory for cracks and leaks. 3. Check all gas lines for leaks. Repair as needed.	/	/	
2	Clean dirt from heater, vaccuming is preferred.	/	/	
3	Check operation of gas valve.	/	/	
4	Check for gas leaks.	/	/	
5	Check operation of thermostat.	/	/	
6	If applicable, replace primary air intake filter.	/	/	
7	As needed, clean spark electrode and reset gap, replace if necessary.	/	/	
8	Inspect flue pipe and connections.	/	/	
9	If applicable, inspect and clean outside air blower and blower intake.	/	/	
10	Inspect unit for proper operation.	/	/	
11	Inspect unit for overall condition and recommend for replacement or other needed repairs.	/	/	

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: HVAC Technician

Additional Notes: