

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: _____ Date of Visit: **7/24/19**

Contractor Personnel on Site:

1. _____	3. _____
2. _____	4. _____

Work Performed:

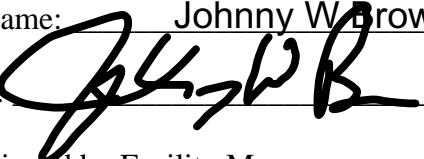
Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. _____
2. _____
3. _____
4. _____
5. _____

CERTIFICATION OF WORK

To be signed by the Contractor:

Print Name: Johnny W Brown Date: 7/24/19

Signed: 

To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

Print Name/Rank: Christopher Huebler Date: 7/24/19

Signed: _____

E-Mail: _____

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST
FENCES

SITE AND BLDG #: **MD005-01**MECHANIC
SIGNATURE: 

DATE:

7/24/19

LOCATION/RM #:

WO# **9048**ASSET # **1163****1164**START TIME: **0900**FINISH TIME: **1630**

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer's recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered.			
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Check posts and corner posts, support guys, and horizontal bars between each support post.			
2	Check wire and anchor point; re-stretch and re-anchor if necessary.			
3	Inspect fence anchors along the bottom of the fence and at the point where the fence is connected to the post.			
4	Treat with galvanized protectant where rust has developed.			
5	Inspect the bottom of the fence to ensure that there is not a gap larger than 2 inches under the fence. Stone or fill as necessary to bring the fence up to standard.			fence is still damaged from the bad storm .
6	Check the top guard and ensure that it is properly fastened (angled out) and the wires are tight. Tighten as required.			
7	Inspect all wire ties and replace as necessary constructed of the same material as the fencing fabric (minimum 9-gauge or heavier zinc coated)			

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes: