


**PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST**  
**VAV BOX**

**SITE AND BLDG #:** Schenectady 060

**MECHANIC  
SIGNATURE:**

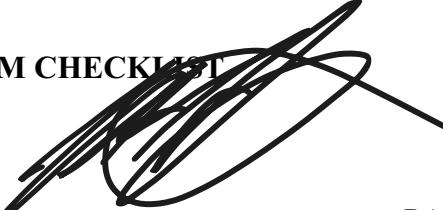

**DATE:** 5/5/2021

**LOCATION/RM #:** building WO# 12550 **ASSET #** 10436

**START TIME:** 0800

**FINISH TIME:** 1000

<b>CHECK POINT</b>	<b>CHECKPOINT DESCRIPTION</b>	<b>TASK COMPLETE</b>		<b>NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)</b>
		<b>YES</b>	<b>NO</b>	
<b>SPECIAL INSTRUCTIONS</b>				
1	In addition to the procedure(s) outlined in this standard, the equipment manufacturer's recommended maintenance procedure(s) and/or instruction(s) shall be strictly adhered.	✓		
2	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	✓		
<b>TO BE PERFORMED AT EACH INSPECTION SERVICE</b>				
1	If EMS system permits, check that the operating controls activate damper per design specifications.	✓		
2	If required, check damper linkage for tightness and lightly lubricate.	✓		
3	If required, inspect dampers for free movement.	✓		
4	If required, inspect actuators for tightness to mounting brackets.	✓		
5	As needed, tighten electrical connections to servo motor.	✓		
6	Inspect unit for overall condition and recommend for replacement or other needed repairs.	✓		

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed description of the deficiency.

To be performed by: HVAC Technician

**Additional Notes:**