

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: NY039 Date of Visit: 3/15/22

Contractor Personnel on Site:

- | | |
|-------------------------|------------|
| 1. <u>Patrick Brown</u> | 3. <u></u> |
| 2. <u></u> | 4. <u></u> |

Work Performed:


Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. WO#'S , 16316 , 16389 , 16390 , 16411 , 16412 , 16573 , 16577 ,
2. 16591 , 16604 , 16441
3. ASSET#'S , 9891 , 9896 , 9932 , 9935 , 9943 , 190917-, 248 , 269 ,
4. 264 , 249 ,
5.

CERTIFICATION OF WORK

To be signed by the Contractor:

Print Name: Patrick Brown Date: 3/15/22

Signed: 

To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

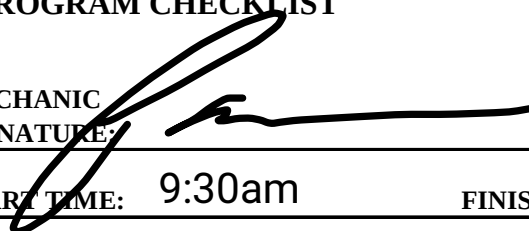
Print Name/Rank: SGT.JEANJULIEN Date: 3/15/22

Signed: 

E-Mail:

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST

GATES

SITE AND BLDG #: **NY039 BLDG1** MECHANIC SIGNATURE:  DATE: **3/15/22**

LOCATION/RM #: **side bldg, back entry** WO# **16412, 16577** ASSET # **190917-269, 9935** START TIME: **9:30am** FINISH TIME: **10am**

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	✓	✓	
2	Notify affected personnel before performing PM	✓	✓	
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Inspect all pivot points, hinges, latches, etc. Apply lubricant where needed, wiping off excess.	✓	✓	used PB blaster garage door lubricant
2	Check all locking devices. Lubricate as required.	✓	✓	all are good
3	Inspect gate support rollers and track, lubricate and clean as required.	✓	✓	used white lithium grease
4	Check bolts, fasteners, and mounting hardware. Tighten as necessary.	✓	✓	all are tight
5	Check for any obstructions that prevent full swing or movement of the gate.	✓	✓	no obstructions
6	Check that shrubs and trees are pruned clear of gate.	✓	✓	shrubs and trees are clear of gate
7	Check hold open devices for proper operation. Lubricate as required.	✓	✓	
8	Check the top guard and ensure that it is properly fastened and the wires are tight. Tighten as required.	✓	✓	top gaurd and wires are tight
9	If applicable, inspect hydraulic driveline (hoses, fittings, and gauges) for signs of leakage.	✓	✓	no hydraulics
10	If applicable, inspect limit switches for proper operation. Adjust as needed.	✓	✓	limit switches are correct
11	If applicable, inspect photoeyes for proper operation and any signs of damage.	✓	✓	no sign's of damage
12	If applicable, have site personnel operate gate with CAC Card insuring proper operation.	✓	✓	gate functions properly with card
13	If applicable, clean control cabinet, ensuring free from debris and insects.	✓	✓	no debris or insects

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed discription of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes:

The rear gate opener has been removed due to construction