

**CERTIFICATION OF WORK
PREVENTIVE MAINTENANCE**

(To be completed by the Contractor and saved in the Contractor's CMMS)

FACID/Building: NY051 Date of Visit: 3/18/22

Contractor Personnel on Site:

- | | |
|-------------------------|------------|
| 1. <u>Patrick Brown</u> | 3. <u></u> |
| 2. <u></u> | 4. <u></u> |

Work Performed:


Preventive Maintenance - Services Completed (Annual, Quarterly, Monthly, equipment identification, etc.)

1. WO#'S , 16323 , 16324 , 16391 , 16392 , 16442-16444 , 16578 ,
2. 16605 , 16325 , 16326 , 16413 , 16445 , 16446
3. ASSET#'S , 10035 , 10036 , 10066 , 10069 , 10046 , 10073 , 10077 ,
4. 10080 , 190917- , 294 , 299 , 278 ,
5.

CERTIFICATION OF WORK

To be signed by the Contractor:

Print Name: Patrick Brown Date: 3/18/22

Signed: 

To be signed by Facility Manager:

By signing the Certification of Work, the said government representative signature does not constitute acceptance of any work performed by the contractor, it only acknowledges that the contractor was on-site during the identified timeline:

Print Name/Rank: SFC ABBOTT Date: 3/18/22

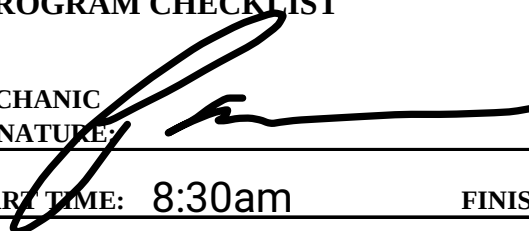
Signed: 

E-Mail:

PREVENTATIVE MAINTENANCE PROGRAM CHECKLIST

GATES

SITE AND BLDG #: NY051 BLDG1

MECHANIC
SIGNATURE: 

DATE: 3/18/22

LOCATION/RM #: BLDG1 WO# 16392, ASSET # 10069
16578 190917-299

START TIME: 8:30am

FINISH TIME: 9am

CHECK POINT	CHECKPOINT DESCRIPTION	TASK COMPLETE		NOTES/ ACTIONS (IF TASK COMPLETE IS CHECKED NO, PROVIDE EXPLANATION)
		YES	NO	
SPECIAL INSTRUCTIONS				
1	Follow lock out/tag out procedures at all times. De-energize or discharge all hydraulic, electrical, mechanical, or thermal energy prior to beginning work.	✓	✓	
2	Notify affected personnel before performing PM	✓	✓	
TO BE PERFORMED AT EACH INSPECTION SERVICE				
1	Inspect all pivot points, hinges, latches, etc. Apply lubricant where needed, wiping off excess.	✓	✓	used PB blaster garage door lubricant
2	Check all locking devices. Lubricate as required.	✓	✓	all are good
3	Inspect gate support rollers and track, lubricate and clean as required.	✓	✓	used white lithium grease
4	Check bolts, fasteners, and mounting hardware. Tighten as necessary.	✓	✓	all are tight
5	Check for any obstructions that prevent full swing or movement of the gate.	✓	✓	no obstructions
6	Check that shrubs and trees are pruned clear of gate.	✓	✓	shrubs and trees are clear of gate
7	Check hold open devices for proper operation. Lubricate as required.	✓	✓	
8	Check the top guard and ensure that it is properly fastened and the wires are tight. Tighten as required.	✓	✓	top gaurd and wires are tight
9	If applicable, inspect hydraulic driveline (hoses, fittings, and gauges) for signs of leakage.	✓	✓	no hydraulics
10	If applicable, inspect limit switches for proper operation. Adjust as needed.	✓	✓	limit switches are correct
11	If applicable, inspect photoeyes for proper operation and any signs of damage.	✓	✓	no sign's of damage
12	If applicable, have site personnel operate gate with CAC Card insuring proper operation.	✓	✓	gate functions properly with card
13	If applicable, clean control cabinent, ensuring free from debris and insects.	✓	✓	no debris or insects

Note: The technician shall perform any repairs identified during PM up to \$250 (direct labor and direct material cost) per PM occurrence. For any deficiencies found exceeding \$250 open a corrective maintenance (CM) ticket and include the Asset #, WO #, photos, and a detailed discription of the deficiency.

To be performed by: General Maintenance Worker

Additional Notes:

there is a capital project submitted to have all the gates replaced
asset# 190917-299 do not function at all